

All Classes

Packages

org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:
org.apache.openjpa:

All Classes

AbstractBrokerFaci
AbstractCFMetaDa
AbstractCFMetaDa
AbstractCFMetaDa
AbstractChangeTra
AbstractClassStrat
AbstractConcurren
AbstractDataCache
AbstractDB2Dictior
AbstractDiscrimina
AbstractEventManager
AbstractExpressior
AbstractExpressior
AbstractFieldStrate
AbstractJDBCListe
AbstractJDBCSave
AbstractJDBCSeq
AbstractLifecycleLi
AbstractLockManag
AbstractLog
AbstractLRSProxy
AbstractLRSProxy
AbstractMetadata
AbstractMetadataF
AbstractNonSeque
AbstractPCData
AbstractPCResultC
AbstractProductDe
AbstractQueryCach
AbstractRemoteCo
AbstractResult
AbstractResultList
AbstractSequential
AbstractSQLServe
AbstractStoreBroke
AbstractStoreMana
AbstractStoreQuer
AbstractStoreQuer
AbstractStrategy
AbstractTask

Overview Package Class Use Tree Deprecated Index Help

PREV CLASS NEXT CLASS


SUMMARY: NESTED | FIELD | CONSTR | METHOD

FRAMES NO FRAMES

DETAIL: FIELD | CONSTR | METHOD

org.apache.openjpa.conf

Class RemoteCommitProviderValue

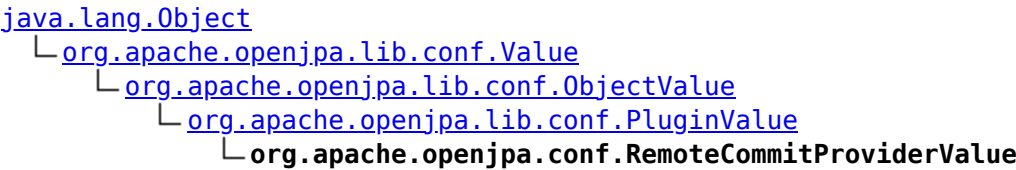

All Implemented Interfaces:

Cloneable

public class RemoteCommitProviderValue
extends PluginValue

Value type used to represent a RemoteCommitProvider. This plugin allows users to specify whether to transmit the ids of added objects in the remote commit events distributed.

Author:
Abe White

Constructor Summary

RemoteCommitProviderValue()

Method Summary	
void	configureEventManager(RemoteCommitEventManager mgr) Configure the remote event manager.
RemoteCommitProvider	getProvider() The cached provider.
boolean	getTransmitPersistedObjectIds() Whether to transmit persisted object ids in remote commit events.
Object	instantiate(Class type, Configuration conf, boolean fatal) Override to keep decorators out of transport configuration.
RemoteCommitProvider	instantiateProvider(Configuration conf) Instantiate the provider.
RemoteCommitProvider	instantiateProvider(Configuration conf, boolean fatal) Instantiate the provider.
void	setProperty(String props)